



“WE MAKE THE KITCHEN BETTER!”

Toll Free: 855-855-0399 Email: info@atosausa.com
www.atosa.com | www.atosausa.com
California, Colorado, Florida, Georgia, Illinois,
Massachusetts, New Jersey, Ohio, Texas, Washington

Back Bar Coolers With Glass Doors

Standard Features

- Stainless steel exterior & interior
- Dixell digital controller
- Maintains temperatures between 33°F – 40°F
- Heavy duty Embraco compressor with environmentally friendly R290 refrigerant
- Slide out compressor assembly for easy maintenance
- LED Interior light(s)
- Magnetic door gasket(s) standard for positive door seal
- Door lock(s) standard
- Pre-installed epoxy coated shelves
- Pre-installed casters

MODELS:

MBB48G-GR / MBB59G-GR
MBB69G-GR / MBB90G-GR



MBB48G-GR



MBB59G-GR



MBB90G-GR



MBB69G-GR

For the best results of food preservation we recommend setting your refrigerator between 33 °F - 38 °F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.



2 YEAR PARTS AND LABOR WARRANTY (US ONLY)
5 YEAR COMPRESSOR PART WARRANTY (US ONLY)





"WE MAKE THE KITCHEN BETTER!"

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com


California, Colorado, Florida, Georgia, Illinois, Massachusetts, New Jersey, Ohio, Texas, Washington

SPECIFICATIONS


Models	Door	Capacity (Cu.Ft.)	Shelves	Casters (inch)	Amps (A)	Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior Dimensions (inch)	Net Weight (lbs)	Gross Weight (lbs)
MBB48G-GR	2	12.9	4	2	2.3	115/60/1	1/7	R290	48×28 ^{1/10} ×40 ^{1/10}	214	262
MBB59G-GR	2	17.3	4	2	2.3	115/60/1	1/7	R290	57 ^{4/5} ×28 ^{1/10} ×40 ^{1/10}	236	284
MBB69G-GR	2	21.5	4	2	2.3	115/60/1	1/7	R290	68×28 ^{1/10} ×40 ^{1/10}	260	317
MBB90G-GR	3	30.1	6	2	2.8	115/60/1	1/5	R290	89 ^{3/10} ×28 ^{1/10} ×40 ^{1/10}	317	392

PLAN VIEW


MBB48G-GR









MBB59G-GR

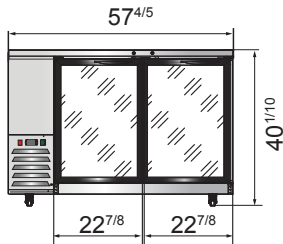

MBB69G-GR

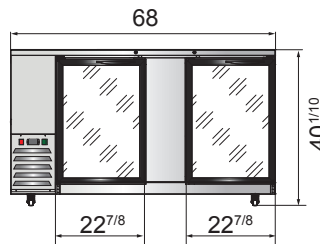

MBB90G-GR

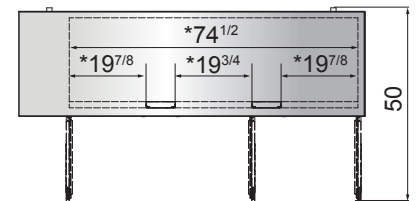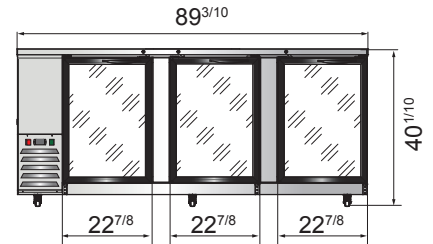

*Interior Dimensions

Epoxy shelves




Door lock



Temperature control



NEMA 5-15P



NEMA
15A/125V